



# Groundsmaster® 1200


## Pull-behind rotary mower

## THE ONLY PULL-BEHIND WORTHY OF BEING A GROUNDSMASTER

The Groundsmaster 1200 delivers an unparalleled combination of productivity, durability and superior cut. It features a 3.7 m (12') width of cut and can mow up to 3.5 ha (8.7 acres) per hour\*. Remaining true to Groundsmaster's unmatched reputation of durability, the 1200 was designed for years of reliable mowing. Its spindles are the same as Toro's large rotaries and capable of withstanding the roughest conditions. The bi-directional impact-resistant system provides additional protection to the wing decks. Don't let its productivity and robust design fool you; the Groundsmaster 1200's independently articulating decks hug undulations for an exceptional finish. Combined with the dual roller design, the Groundsmaster 1200 delivers a high quality cut and rich turf striping in most conditions.

Productivity, durability and exceptional cut. That's what makes the 1200 the only pull-behind worthy of being a Groundsmaster.

[toro.com](https://toro.com)

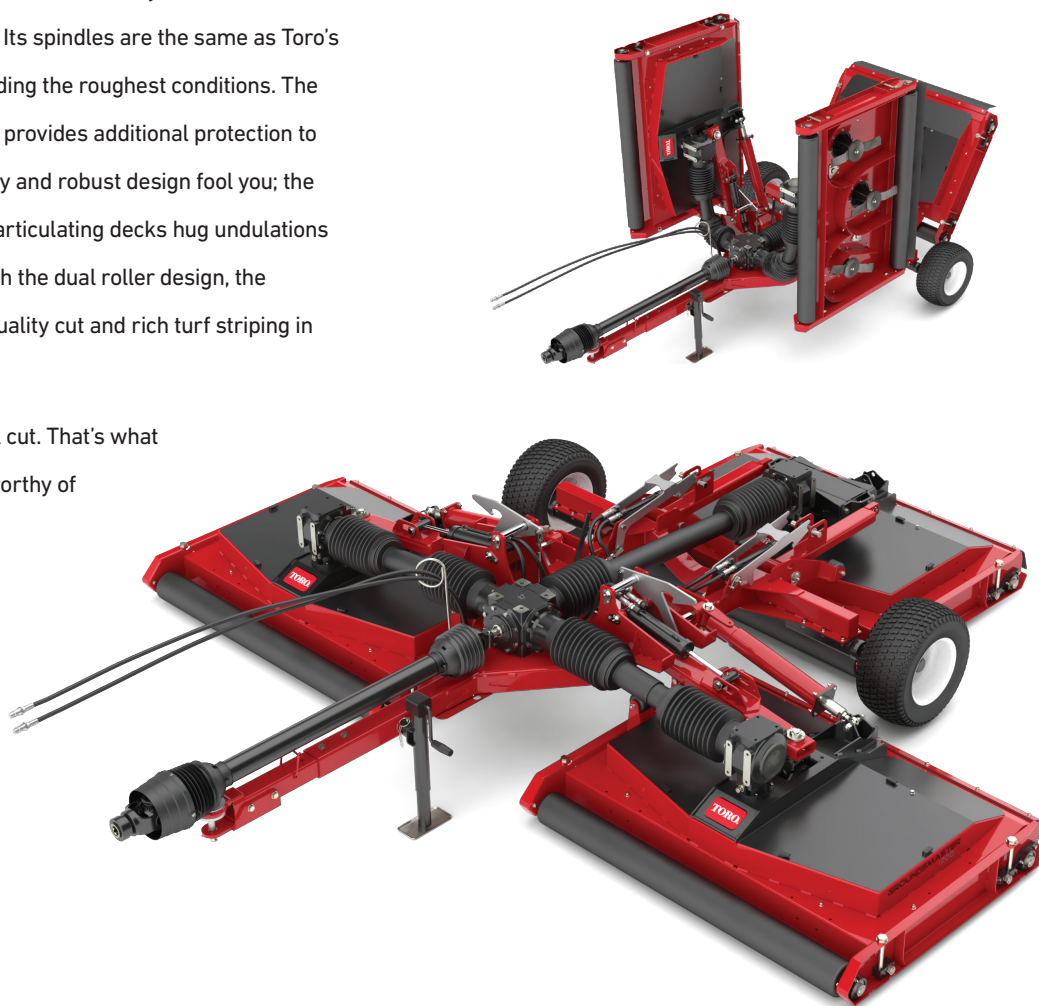

## F E A T U R E S

- Width of cut: 3.7 m (12')
- Height of cut: 1.3–10.2 cm (0.5–4.0")
- Compatible with Outcross® 9060 and minimum 26.1 kW (35 PTO hp) tractors
- Three independent, fully articulating decks
- Wing decks fold up for quick transport

|                           | GROUNDMASTER 1200 - MODEL 31905                                                                                                                                                                                                                                                             |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>WIDTH OF CUT</b>       | Overall: 365 cm (144"), individual deck: 137 cm (54"), overlap: 23 cm (9")                                                                                                                                                                                                                  |
| <b>MOWING RATE**</b>      | Mows up to 3.5 ha/h (8.7 acres/h) at consistent 6 mph                                                                                                                                                                                                                                       |
| <b>CONSTRUCTION</b>       | 10-gauge high-strength steel constructed deck with 7-gauge bolt-in reinforcements. 7-gauge welded steel side skids with 12.7 cm (5") diameter steel rollers.                                                                                                                                |
| <b>DECK DRIVE</b>         | PTO drive-shaft drives 4-way gearbox, secondary drive-shafts drive individual deck gearboxes, spindles belt driven with spring tensioner pulley. Main drive-shaft fits standard 3.5 cm (1-3/8"), 6-spline tractor PTO and contains 80° CV joint. Deck gearbox contains over-running clutch. |
| <b>HEIGHT OF CUT</b>      | 1.3–10.2 cm (0.5–4.0") infinitely variable                                                                                                                                                                                                                                                  |
| <b>SPINDLES</b>           | 3.17 cm (1.25") diameter spindle shafts, 22.9 cm (9") diameter conical ductile iron housing and two greaseable tapered roller bearings. Driven counter-clockwise when viewed from the top.                                                                                                  |
| <b>BLADES</b>             | 9 blades, 48.3 cm (19") long, 6.4 cm (2.5") wide, 6.4 mm (0.25") thick                                                                                                                                                                                                                      |
| <b>GROUND FOLLOWING</b>   | 9 anti-scalp cups, one on each blade, two anti-scalp/stripping rollers on each deck. On each deck: two 12.7 cm (5") diameter roller                                                                                                                                                         |
| <b>WING PROTECTION</b>    | Bi-directional, impact absorption damper on each wing deck                                                                                                                                                                                                                                  |
| <b>OVERALL DIMENSIONS</b> | Transport height: 192.4 cm (75.75")    Transport length (Hitch fully extended): 369.6 cm (145.5")    Width (decks down): 380.5 cm (149.8")<br>Transport width: 218.4 cm (86") at 1.27 cm (1/2") HOC                                                                                         |
| <b>POWER REQUIREMENTS</b> | Minimum 26.1 kW (35 hp) at the PTO, 540 rpm                                                                                                                                                                                                                                                 |
| <b>BLADE TIP SPEED</b>    | 4,572 ± 91.4 m/min (15,000 ± 300 ft/min) at 540 PTO rpm                                                                                                                                                                                                                                     |
| <b>TYRES</b>              | 20 x 10-10, 6-ply, K500 turf tread                                                                                                                                                                                                                                                          |
| <b>WEIGHTS</b>            | Total weight: 1,354 kg (2,984 lb)    Tongue weight in transport: 313 kg (691 lb)                                                                                                                                                                                                            |
| <b>ACCESSORIES</b>        | Roller scraper kit, standard blade kit, high-lift blade kit, safety chain kit, atomic blade kit, tow chain kit, fender kit, SMV kit, rear light kit, blade cover kit, clevis hitch, pintle eye hitch                                                                                        |
| <b>WARRANTY</b>           | Two-year warranty. Refer to the Operator's Manual for further details.                                                                                                                                                                                                                      |
| <b>CERTIFICATION</b>      | Complies with American National Standards Institute (ANSI B71.4-2012)                                                                                                                                                                                                                       |



\*Specifications and design subject to change without notice.

\*\*Assumes max. mow speed and 100% efficiency. Actual mowing rates may vary depending on operator and conditions.

Rev. 4/24

The Groundmaster 1200 is manufactured in Tomah, WI ISO 9002 Certified Plant.



## toro.com

Worldwide Headquarters  
The Toro Company  
8111 Lyndale Ave. So.  
Bloomington, MN 55420 U.S.A.  
Phone: (1) 952 888 8801

©2024 The Toro Company.  
All rights reserved.  
24-201-GB



facebook.com  
twitter.com/TheToroCompany  
youtube.com/ToroCompanyEurope



Count on it.