



REDUCE SOIL COMPACTION FOR HEALTHIER TURF.

ProCore SR Series deep-tine aerators alleviate subsurface soil compaction, helping to create an environment for turf to thrive. These durable and time-tested products are capable of withstanding the most extreme aeration conditions. From lightweight, precision machines to robust, heavy-duty machines to break up soil on even the most compact surfaces, the ProCore SR Series deep-tine aerators are the ultimate choice for performance and quality.




toro.com/procoresr

FEATURES

Deep-tine aerification relieves soil compaction at lower soil levels than typical aerification. The tines fracture the soil creating channels through the root zone allowing oxygen, water and critical nutrients to penetrate deep into the soil profile.

- Multiple high-performance units for a wide variety of aeration applications
- Aeration widths of 1.37–1.85 m (54"–73")
- Aeration depths to 40.6 cm (16")
- Hydraulic depth control makes setting aeration depth easy
- Solid and coring tines available for your specific aeration application

The deep-tine difference.

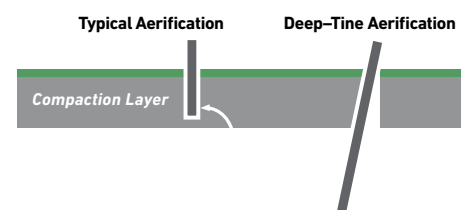

	PROCORE SR54 MODEL 09931	PROCORE SR54-S MODEL 09932	PROCORE SR70 MODEL 09933	PROCORE SR70-S MODEL 09934	PROCORE SR72 MODEL 09935
WEIGHT WITH PTO & TOP LINK	528 kg (1,165 lbs)	563 kg (1,242 lbs)	623 kg (1,373 lbs)	679 kg (1,498 lbs)	948 kg (2,091 lbs)
WORKING WIDTH	1.37 m (54")		1.85 m (73")		1.83 m (72")
WORKING DEPTH (ADJUSTABLE)	25–250 mm (1"–10")				25–406 mm (1"–16")
HOLE SPACING	64–102 mm (2.5"–4")				75–150 mm (3"–6")
PRODUCTIVITY	3,345 m³/h (36,000 ft²/h)		4,460 m³/h (48,000 ft²/h)		3,530 m³/h (38,000 ft²/h)
RECOMMENDED TRACTOR SIZE	12–13.4 kW (16–18 hp)	13.4 kW (18 hp)	18.6–26.1 kW (25–35 hp)		33.6 kW (45 hp)
RECOMMENDED LIFT CAPACITY	544 kg (1,200 lbs)	682 kg (1,500 lbs)	773 kg (1,700 lbs)	817 kg (1,800 lbs)	1,270 kg (2,800 lbs)
RECOMMENDED COUNTER WEIGHT	70 kg (150 lbs)		115 kg (250 lbs)		135–225 kg (300–500 lbs)
RECOMMENDED PTO SPEED	400–500 rpm				
ACTUAL WORKING SPEED @ 400 PTO RPM (VARIES WITH HOLE SPACING)	1.5–2.5 mph (2.41–4.02 km/h)				0.8–1.5 mph (1.29–2.41 km/h)
LIFT SYSTEM	Standard 3-point				
CERTIFICATION	ISO 4254-5:2008. CE and EU machinery directives				
WARRANTY	Two-year or 500-hour warranty. Refer to Operator's Manual for further details				

	PROCORE SR SERIES ACCESSORIES
	REAR ROLLER OPTIONS
09952	Rear Roller Kit for ProCore SR54 / SR54S
09953	Rear Roller Kit for ProCore SR70 / SR70S
09954	Rear Roller Kit for ProCore SR72

*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only.
Actual products offered for sale may vary in use, design, required attachments and safety features. Consult your local Toro Distributor.

Rev. 1/25



toro.com

Worldwide Headquarters
The Toro Company
8111 Lyndale Ave. So.
Bloomington, MN 55420 U.S.A.
Phone: (1) 952 888 8801

©2025 The Toro Company.
All Rights Reserved.
25-139-GB



facebook.com
youtube.com/ToroCompanyEurope
x.com/TheToroCompany



Count on it.